

ES1A - ES1J

1.0AMP. Surface Mount Super Fast Rectifiers



FEATURES

- ✧ Glass passivated junction chip
- ✧ For surface mounted application
- ✧ Low profile package
- ✧ Built-in strain relief
- ✧ Ideal for automated placement
- ✧ Easy pick and place
- ✧ Super fast recovery time for high efficiency
- ✧ Glass passivated chip junction
- ✧ High temperature soldering:



MECHANICAL DATA

- ✧ Cases: Molded plastic
- ✧ Terminals: Pure tin plated, lead free
- ✧ Polarity: Indicated by cathode band
- ✧ Weight: 0.078 grams


VOLTAGE RANGE

50 to 1000 Volts

CURRENT

1.0 Ampere

DO-214AC

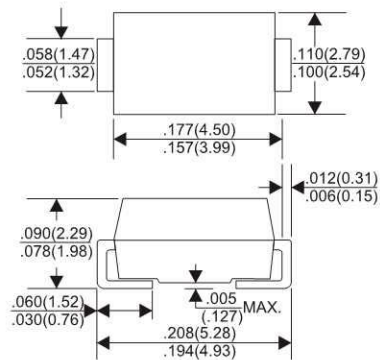

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	ES 1A	ES 1B	ES 1C	ES 1D	ES 1F	ES 1G	ES 1H	ES 1J	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	1								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	30								A
Maximum Instantaneous Forward Voltage (Note 1) @ 1 A	V_F	0.95				1.3		1.7		V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ $T_A=25\text{ }^{\circ}\text{C}$ @ $T_A=125\text{ }^{\circ}\text{C}$	I_R	5 100								μA μA
Maximum Reverse Recovery Time (Note 2)	T_{rr}	35								nS
Typical Junction Capacitance (Note 3)	C_j	16				18				pF
Maximum Thermal Resistance	$R_{\theta JA}$ $R_{\theta JL}$	85 35								$^{\circ}\text{C/W}$
Operating Temperature Range	T_J	- 55 to + 150								$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	- 55 to + 150								$^{\circ}\text{C}$

Note 1: Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2: Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$

Note 3: Measured at 1 MHz and Applied $V_R=4.0$ Volts

RATINGS AND CHARACTERISTIC CURVES (ES1A THRU ES1J)

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

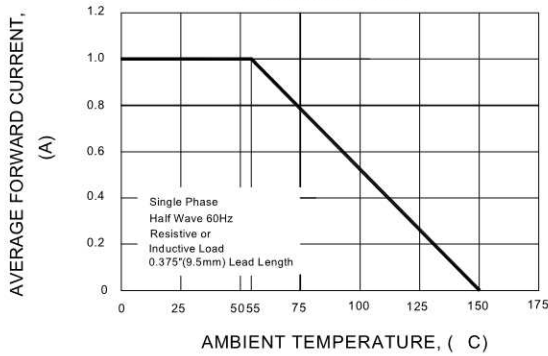


FIG. 2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

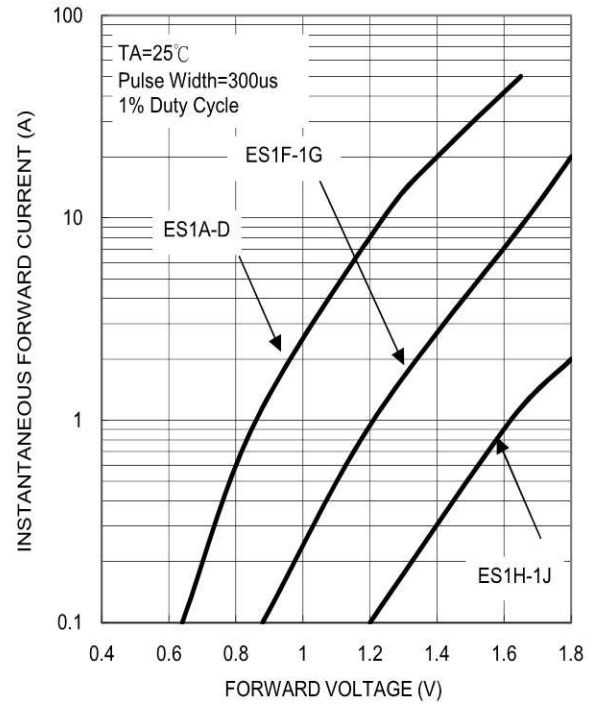


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD PEAK SURGE CURRENT

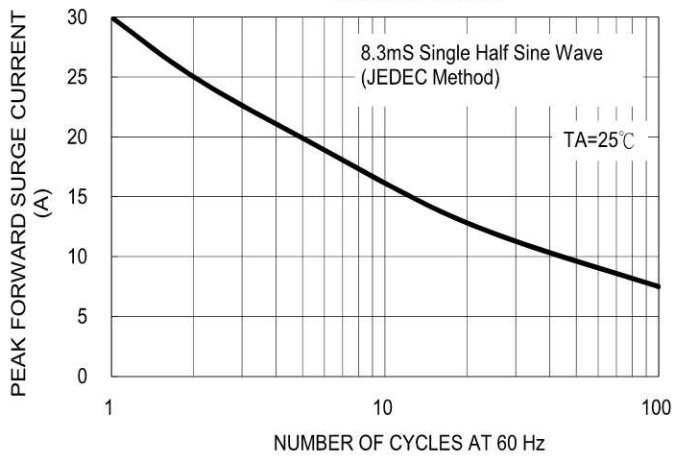


FIG. 4- TYPICAL JUNCTION CAPACITANCE

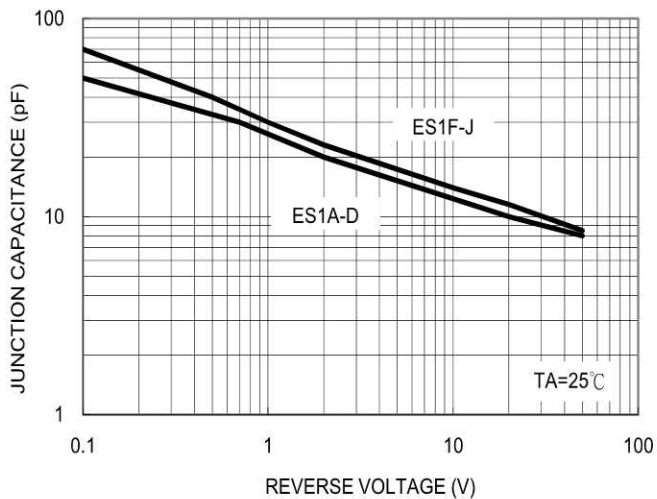


FIG. 5- TYPICAL REVERSE CHARACTERISTICS

